

FL10c-150W : FL10c-150W-4000K-IP65-110D-E

LED Flood Light,150W,18750lm,220-240VAC,4000K,120°,IP65,Dim.330X60X430mm., (Osram LED + Lucio Driver)



GENERAL PRODUCT DATA

Product	FL10c-150W,
Category	
Technical Description	LED Flood Light,150W,18750lm,220-240VAC,4000K,120°,IP65,Dim.330X60X430mm., (Osram LED + Lucio Driver)
Mounting Type	Surface
Color	Black

LIGHT TECHNICAL DATA

Light Source	SMD
Lum Flux (LM)	18750lm
Lighting Efficiency (lm/W)	125
CCT	
CRI	Ra>70
CRI(Optional)	
MacAdam Step	Mac Adam Step 5
MacAdam Step (On request)	
Beam Angle	110°

POLAR DIAGRAM

ELECTRICAL PRODUCT DATA

Wattage (w)	150
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non-Dimmable
Dimming(Optional 1)	DALI
Dimming(Optional 2)	


MECHANICAL DATA

Material	Die-Cast Aluminium
Dimensions	330X60X430mm.
Cut out	
IP	65
IK	
Operating temperature	-20~+50°C
Product weight	

LED LIFESPAN

Led Lifespan	> 50,000 Hours
--------------	----------------

DIMENSIONAL DRAWING

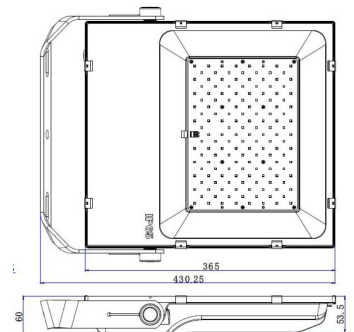


● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

www.lucio-international.com
info@lucio-international.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).
We reserve the right to make technical changes.

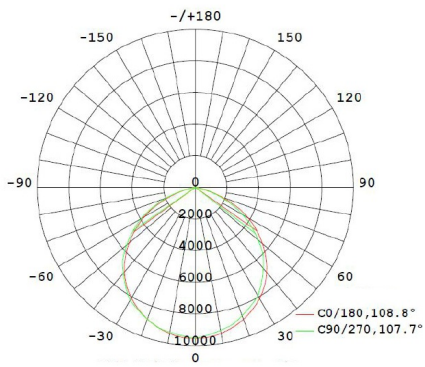

● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

www.lucio-international.com
 info@lucio-international.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).
 We reserve the right to make technical changes.