

S28e-13W : S28e-13W-4000K-IP65-60D-E

LED Spotlight, 13W, 1300lm, 220-240VAC, 4000K, 60°, IP65,
Dia.110x64.3mm.



GENERAL PRODUCT DATA

Product Category	S28e-13W,
Technical Description	LED Spotlight, 13W, 1300lm, 220-240VAC, 4000K, 60°, IP65, Dia.110x64.3mm.
Mounting Type	Recessed
Color	White

LIGHT TECHNICAL DATA

Light Source	COB
Lum Flux (LM)	1300lm
Lighting Efficiency (lm/W)	100
CCT	4000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	<3
MacAdam Step (On request)	
Beam Angle	60°

POLAR DIAGRAM

ELECTRICAL PRODUCT DATA

Wattage (w)	13
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non-Dimmable
Dimming(Optional 1)	DALI
Dimming(Optional 2)	1-10 Dimming


MECHANICAL DATA

Material	Die-Cast Aluminum
Dimensions	ø110X64.3mm.
Cut out	ø95mm.
IP	65
IK	
Operating temperature	-20~+45°C
Product weight	0.45Kg

LED LIFESPAN

Led Lifespan	> 50,000 Hours
--------------	----------------

DIMENSIONAL DRAWING

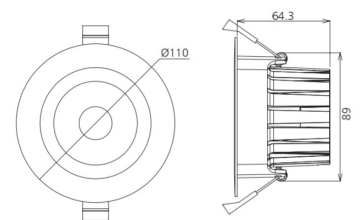

● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

www.lucio-international.com
info@lucio-international.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).
We reserve the right to make technical changes.