

## DS22f-30W : DS22f-30W-5000K-IP20-36D-P

LED Downlight, 30W, 2700lm, Ra>80, 220-240VAC, 5000K, 36°, IP20, 140X70X115mm




### GENERAL PRODUCT DATA

Product Category	DS22f-30W,
Technical Description	LED Downlight, 30W, 2700lm, Ra>80, 220-240VAC, 5000K, 36°, IP20, 140X70X115mm
Mounting Type	Recessed
Color	White

### LIGHT TECHNICAL DATA

Light Source	COB
Lum Flux (LM)	2700
Lighting Efficiency (lm/W)	90
CCT	5000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	<3
MacAdam Step (On request)	
Beam Angle	36°

### POLAR DIAGRAM

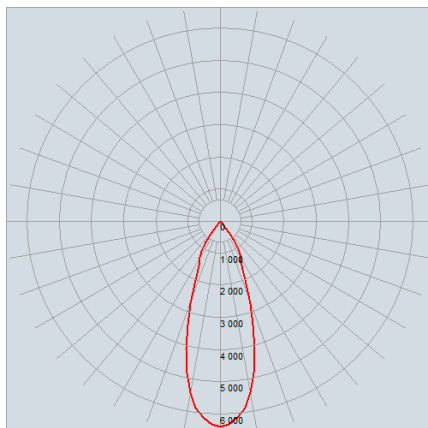

### ELECTRICAL PRODUCT DATA

Wattage (w)	30
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non-Dimmable
Dimming(Optional 1)	DALI
Dimming(Optional 2)	1-10V Dimming


### MECHANICAL DATA

Material	Aluminium Die-cast
Dimensions	140X70X115mm
Cut out	70X137mm.
IP	20
IK	02
Operating temperature	-20~+40°C
Product weight	

### LED LIFESPAN

Led Lifespan	> 50,000 hours
--------------	----------------

### DIMENSIONAL DRAWING

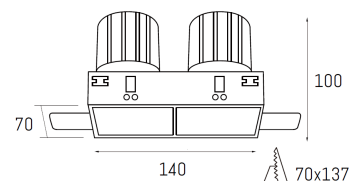

● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

[www.lucio-international.com](http://www.lucio-international.com)  
[info@lucio-international.com](mailto:info@lucio-international.com)

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121). We reserve the right to make technical changes.