

LED Flood Light : FL20b-18W-3000K-IP67-10D-P

LED Flood Light, 18W, 1440lm, 220-240VAC, 3000K, 10°, IP67,
Dim.120x120x95mm.




GENERAL PRODUCT DATA

Product Category	LED Flood Light,
Technical Description	LED Flood Light, 18W, 1440lm, 220-240VAC, 3000K, 10°, IP67, Dim.120x120x95mm.
Mounting Type	Surface
Color	Grey

LIGHT TECHNICAL DATA

Light Source	SMD
Lum Flux (LM)	1440
Lighting Efficiency (lm/W)	80
CCT	3000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	<3
MacAdam Step (On request)	
Beam Angle	10°

POLAR DIAGRAM

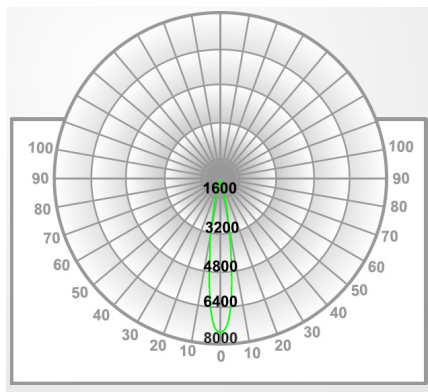

ELECTRICAL PRODUCT DATA

Wattage (w)	18
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non-Dimming
Dimming(Optional 1)	DALI
Dimming(Optional 2)	1-10 Dimming


MECHANICAL DATA

Material	Die-Cast Aluminum / Tempered glass - Diffuser
Dimensions	120x120x95mm.
Cut out	
IP	67
IK	06
Operating temperature	-20~+45°C
Product weight	

LED LIFESPAN

Led Lifespan	L70 > 50,000 Hours
--------------	--------------------

DIMENSIONAL DRAWING

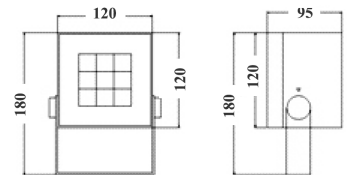

● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

www.lucio-international.com
info@lucio-international.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).
We reserve the right to make technical changes.