

DR27e-45W : DR27e-45W-5000K-IP20-60D-E

LED Downlight, 45W, lm, Ra>80, 220-240VAC, 5000K, 60°, IP20, ø180x128.5mm




GENERAL PRODUCT DATA

Product Category	DR27e-45W,
Technical Description	LED Downlight, 45W, lm, Ra>80, 220-240VAC, 5000K, 60°, IP20, ø180x128.5mm
Mounting Type	Recessed
Color	White

LIGHT TECHNICAL DATA

Light Source	COB
Lum Flux (LM)	5020
Lighting Efficiency (lm/W)	111
CCT	5000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	<4
MacAdam Step (On request)	
Beam Angle	60°

POLAR DIAGRAM

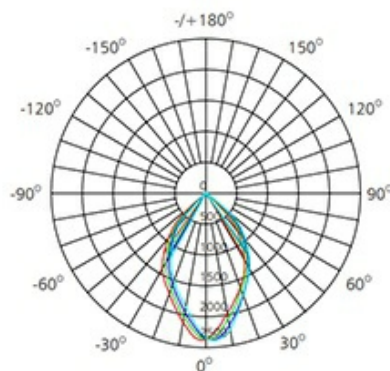

ELECTRICAL PRODUCT DATA

Wattage (w)	45
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non Dimming
Dimming(Optional 1)	DALI
Dimming(Optional 2)	1-10 Dimming


MECHANICAL DATA

Material	Die-Cast Aluminum
Dimensions	ø180x128.5mm
Cut out	ø167mm
IP	20
IK	02
Operating temperature	-20~+40°C
Product weight	1.007Kg

LED LIFESPAN

Led Lifespan	> 50,000 Hours
--------------	----------------

DIMENSIONAL DRAWING

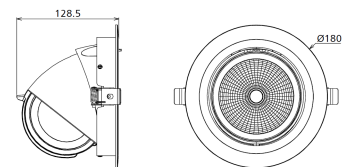

● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

www.lucio-international.com
info@lucio-international.com

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121). We reserve the right to make technical changes.