

## BL42b-10W : BL42b-10W-4000K-IP66-180-P

LED Bollard Light,10W,1380lm,Ra>80,220-240VAC,4000K,180°,IP66,ø180X260mm




### GENERAL PRODUCT DATA

Product Category	BL42b-10W,
Technical Description	LED Bollard Light,10W,1380lm,Ra>80,220-240VAC,4000K,180°,IP66,ø180X260mm
Mounting Type	Surface
Color	Aluminium

### LIGHT TECHNICAL DATA

Light Source	SMD
Lum Flux (LM)	1380
Lighting Efficiency (lm/W)	138
CCT	4000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	<3
MacAdam Step (On request)	
Beam Angle	180

### POLAR DIAGRAM

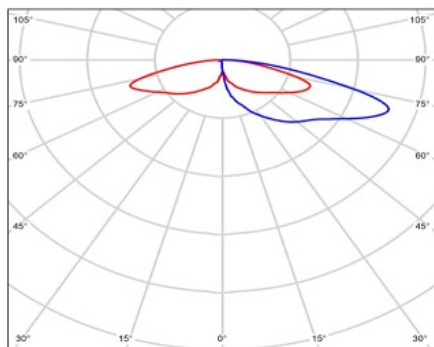

### ELECTRICAL PRODUCT DATA

Wattage (w)	10
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non Dimming
Dimming(Optional 1)	
Dimming(Optional 2)	1-10 Dimming


### MECHANICAL DATA

Material	Aluminium
Dimensions	ø180X260mm
Cut out	
IP	66
IK	10
Operating temperature	-20~+50°C
Product weight	

### LED LIFESPAN

Led Lifespan	> 50,000 Hours
--------------	----------------

### DIMENSIONAL DRAWING



● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

[www.lucio-international.com](http://www.lucio-international.com)  
[info@lucio-international.com](mailto:info@lucio-international.com)

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).  
We reserve the right to make technical changes.