

## DR80b-13W-4000K-IP54-45D-P

LED Surface Mounted, 13W, 1170lm, 220-240VAC, 4000K, 45°, IP54, Ø170X185mm.(Lucio Flicker free driver)




### GENERAL PRODUCT DATA

Product Category	
Technical Description	LED Surface Mounted, 13W, 1170lm, 220-240VAC, 4000K, 45°, IP54, Ø170X185mm.(Lucio Flicker free driver)
Mounting Type	Surface
Color	White

### LIGHT TECHNICAL DATA

Light Source	COB
Lum Flux (LM)	1170lm
Lighting Efficiency (lm/W)	90
CCT	4000K
CRI	Ra>80
CRI(Optional)	Ra>90
MacAdam Step	Mac Adam Step 3
MacAdam Step (On request)	Mac Adam Step 2
Beam Angle	45°

### POLAR DIAGRAM

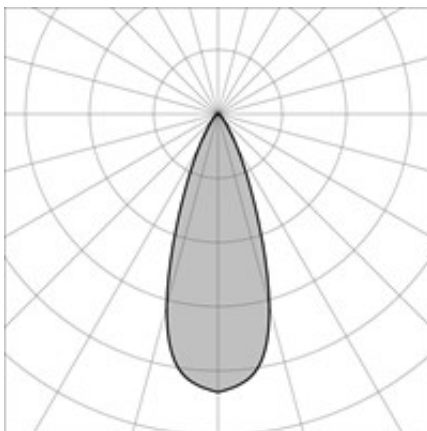

### ELECTRICAL PRODUCT DATA

Wattage (w)	13
Voltage Range (V)	220-240VAC
Frequency	50/60Hz
Driver	Non-Dimmable
Dimming(Optional 1)	DALI
Dimming(Optional 2)	1-10 Dimming


### MECHANICAL DATA

Material	Aluminum
Dimensions	Ø170X185mm
Cut out	
IP	54
IK	
Operating temperature	-20~+45°C
Product weight	

### LED LIFESPAN

Led Lifespan	> 50,000 Hours
--------------	----------------

### DIMENSIONAL DRAWING



● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT

Lucio Lighting B.V

[www.lucio-international.com](http://www.lucio-international.com)  
[info@lucio-international.com](mailto:info@lucio-international.com)

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).  
We reserve the right to make technical changes.